

The DataSafe® HX range of valve regulated lead acid batteries has been designed to offer superior solutions for the Uninterruptible Power Supply (UPS) and Information Technology markets. DataSafe HX batteries are the ideal source of power to protect vital systems and incorporates select design features that maximise reliability while ensuring superior performance and an excellent service life.

DataSafe HX batteries are designed using proven gas recombination technology that removes the need for regular water addition by controlling the evolution of hydrogen and oxygen during charging. The use of gas recombination technology for lead acid batteries has totally changed the concept of standby power. This technology provides the user with the freedom to use lead acid batteries in a wide range of applications.

The 12HX380 and 12HX330e monoblocs are just two of the latest additions to the highly successful, superior power density DataSafe HX battery range from EnerSys®. Built on advanced electrochemistry and backed by over 100 years experience in battery technology and manufacture, these monoblocs have been specifically developed for high discharge rate applications.

For power density, space optimisation and reliability, there is no substitute to DataSafe HX batteries.

RANGE SUMMARY

Features & Benefits

- Specifically developed for UPS applications
- 6 & 12 volt monoblocs
- 23 to 780 Watts/cell sizes
(15 min. rate to 1.67Vpc at 25°C)
- High power density
- Optimum footprint and volume efficiency
- Long design life
- Proven VRLA AGM technology



Construction

- Electrochemistry optimised for high rate discharge applications
- High performance positive plate grids designed to resist corrosion, prolong active life and for efficient recharge
- Negative plates provide perfect balance with the positive plates to ensure optimum recombination efficiency
- Separators in low resistance microporous glass fibre. The electrolyte is absorbed within this material, preventing acid leakage in case of accidental damage
- Containers and lids in highly resistant polymer

- Electrolyte - high grade dilute sulphuric acid absorbed into separator material
- High integrity terminals designed for maximum conductivity
- High integrity, leak-resistant post seal design for long life
- Self regulating pressure relief valves - prevent ingress of atmospheric oxygen

- Recommended float charge voltage: 2.25 - 2.28Vpc at 25°C
- Operating temperature range: -20°C to +50°C (20°C - 25°C recommended)
- Up to six months shelf life

Installation & Operation

- Monoblocs are designed to be installed on their base. Consult your local EnerSys® representative before installing in any other orientation

Standards


- UL listing: file numbers MH16464 for 12HX25 - 12HX150, MH15740 for 12HX330e and 12HX380, MH12544 for 12HX205 - 6HX800
- Approved for shipping as non-hazardous, non-spillable - per IATA Special Provision A67 and 49 CFR
- Manufactured in EnerSys® ISO 9001:2000 and ISO 14001:2004 certified production facilities

General Specifications


DataSafe® HX Battery Type	Nominal Voltage (V)	Watts/Cell (Wpc) 15min/1.67Vpc at 25°C	Nominal Capacity (Ah) C ₁₀ /1.80Vpc at 25°C	Nominal Dimensions (mm)			Typical Weight (kg)	Short Circuit Current (A)	Max. Discharge Current (Amps-2 min rate)	Internal Resistance (mΩ)	Terminal Layout	Terminal Drawing
				Length	Width	Height						
12HX25	12	23	5.0	90	70	107	2.0	300	41	16.5	1	A
12HX35	12	36	7.0	151	65	100	2.8	500	62	13.2	4	A
6HX50	6	53	11	151	50	99	2.1	720	93	6.1	1	A
12HX50	12	53	11	152	99	99	4.1	720	93	12.2	4	A
12HX80	12	80	16	181	76	167	6.4	1000	140	8.5	2	B
12HX105	12	100	21	166	175	125	10.0	1500	171	7.1	2	B
12HX135	12	135	28	196	130	169	11.8	1800	238	5.6	1	B
12HX150	12	150	33	197	165	170	14.5	2400	277	5.0	2	C
12HX205	12	204	45	226	140	206	19.5	2775	439	4.5	1	C
12HX300	12	284	72	259	175	208	27.2	3175	503	3.9	1	C
12HX330e	12	330*	80*	302	175	227	32.5	2240	586	5.5	1	C
12HX330	12	336	84	300	173	213	32.2	3700	586	3.4	1	C
12HX380	12	380*	90*	302	175	227	35.0	2400	765	5.2	1	C
12HX400	12	381	93	338	173	211	36.3	4225	670	3.0	1	C
12HX505	12	506	123	338	173	273	46.7	4510	913	2.8	1	C
12HX540	12	540	126	338	173	273	48.1	4775	961	2.6	1	C
6HX800	6	780	196	340	173	211	36.3	6200	1272	1.0	3	C

* Data based at 20°C

Terminal Layouts

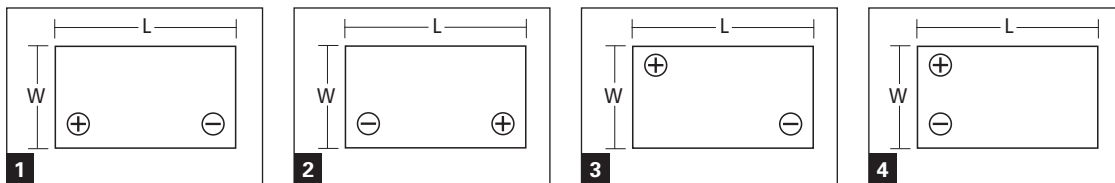

Terminal Drawings

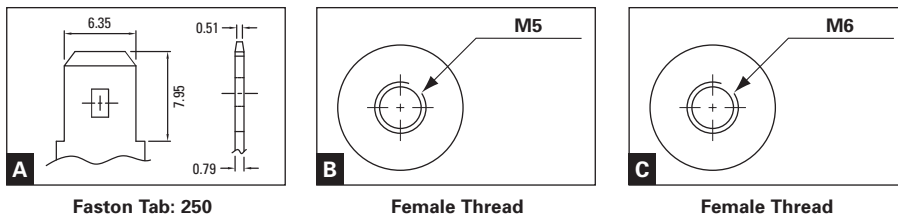

www.enersys-emea.com

EnerSys
P.O. Box 14145
Reading, PA 19612-4145
USA
Tel. +1-610-208-1991
Fax +1-610-372-8613

EnerSys - (EMEA)
EH Europe GmbH
Löwenstrasse 32
8001 Zurich, Switzerland

EnerSys Asia
152 Beach Road
Gateway East Building, Level 11
189721 Singapore
Tel: +65 6508 1780

EnerSys Ltd.
Oak Court
Clifton Business Park
Wynne Avenue, Swinton
Manchester M27 8FF
UK
Tel: +44 (0)161 794 4611
Fax: +44 (0)161 727 3809

Contact:
Light Technologies Co., Ltd.
Tel: +86-755-61289329
Fax: +86-755-61624455
www.light-corp.cn

© 2011 EnerSys®. All rights reserved.
Trademarks and logos are the property of EnerSys® and its affiliates unless otherwise noted.

Subject to revisions without prior notice. E.&O.E.

Publication No. EN-HX-RS-011 - October 2011